


<b>MACAO</b>		<b>145</b>	<b>145</b>
<b>Technical Data</b>		<b>(-) AD IQ LED</b>	<b>(U) AD* IQ LED</b>
Gross content	l	500	500
Net content	l	241	234/153/217
Total display area (TDA)	m <sup>2</sup>	0,76	0,76
Classification acc. to EN 23953		3L1	3S/3S/3L1
Ambient temperature range	°C	+16 to +25	+16 to +25
Inner temperature range**	°C	-18 to -23	+3 to +15/0 to +2/-18 to -23
Sound pressure in 1 m distance	dB(A)	43,6	43,6
<b>Electrical Data</b>			
Nominal voltage/frequency	V/Hz	220-240/50	220-240/50
Nominal power consumption cabinet	W	400	400
Nominal power illumination	W	32	32
Nominal current	A	3,7	3,7
Fuse protection	A	16	16
Energy consumption (at 25°C)	kWh/24h	5,1	1,4/2,5/5,1
Length of power supply cord	mm	1750	1750
<b>Refrigeration Data</b>			
Refrigerant type		R290	R290
Refrigerant charge	g	100	100
Max. operating pressure	bar	30	30
<b>Dimensions</b>			
Length outside/inside	mm	1456/1328	1456/1328
Depth outside/inside	mm	851/723	851/723
Front access height/height outside	mm	900/925	900/925
Height inside front/rear	mm	523	523
Stacking height (is basket height for meat cooling)	mm	280	300/187/280
<b>Weight</b>			
Net Weight (excl. packaging, incl. internal accessories necessary for meat cooling)	kg	122	131
Gross Weight (incl. packaging, incl. internal accessories necessary for meat cooling)	kg	130	139

\*Switchable cabinet: Temperature setting from -23°C to +15°C possible, inner temperature range has to be chosen according to product requirements  
 \*\*Preset is fixed at 4 °C – possibility to change to another temperature by a service technician.

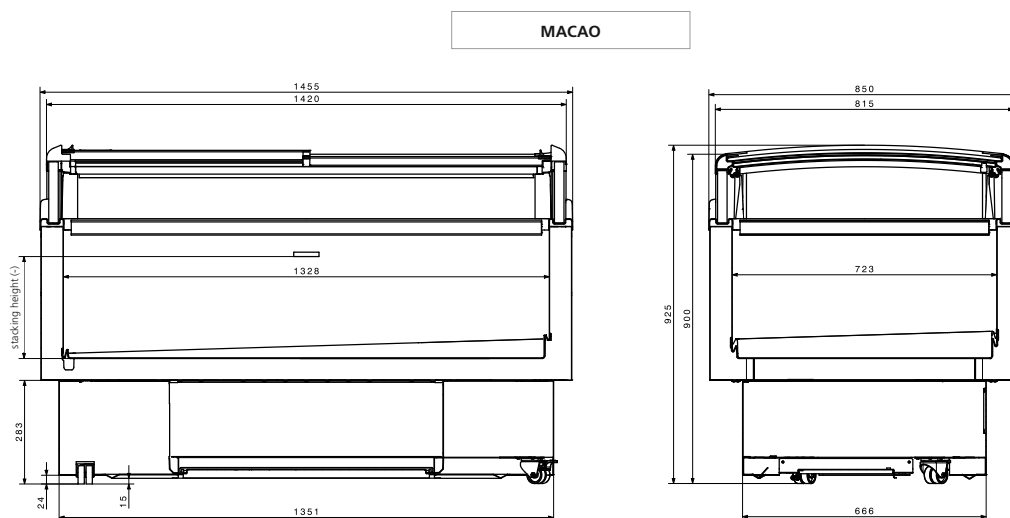

**AHT**  
 green.freshness.worldwide

AHT Cooling Systems GmbH  
 8786 Rottenmann · Austria  
 Phone +43/(0)3614/2451-0  
 Fax +43/(0)3614/2451-8  
 Email office@aht.at

OHSAS 18001  
 SA 8000

ISO 9001  
 ISO 14001



# MACAO

The all-round visibility booster.



**MINIMAL SPACE REQUIREMENTS.  
MAXIMUM SALES PROMOTION.**

# UNITING LATEST TECHNOLOGY AND BRILLIANT DESIGN.

## Key benefits

- | Extremely low energy consumption due to RPM-regulated compressor technology and electronic energy-saving fan
- | Ecologically sound refrigerant R290 (propane)
- | Convincingly efficient: the island chest freezer and chiller MACAO impresses with smart, up-to-date technical features, maximum energy efficiency and a new dimension of sales potency
- | Sales-boosting product visibility thanks to glass panels on all four sides
- | Improved ease of use thanks to semiautomatic defrosting and easy-to-clean plastic bin
- | Attractive LED interior lighting
- | Robust, smooth-running, single-piece and fully extrusion-coated glass sliding lids (lockable)



## Temperature ranges

- |                                    |                  |
|------------------------------------|------------------|
| Chilling                           | +3 °C to +15 °C* |
| Freezing                           | -18 °C to -23 °C |
| Meat and minced meat refrigeration | 0 °C to +2 °C    |

## Accessories

- | Baskets and grid systems
- | EPOS strips
- | POS frame

\* Preset is fixed at 4 °C – possibility to change to an other temperature by a service technician

